

GES-5400

This extreme-volume 2-flavor soft serve freezer is perfect for serving lots of product in a short amount of time! Features the GES-5400 Genesis Series™ with the Virtual Quality Management System™ to streamline your business. Includes a front-loading refrigerated cabinet with a high speed pump. Our pressurized machines consistently produce smooth and creamy high and low fat products like ice cream, custard, yogurt and sorbets. Excellent for full-menu ice cream and custard stores, sports arenas & stadiums.



Multi-function LED Display
with manager smart tools.

Virtual Quality Management System™
monitors Temperature and Consistency to
provide superior taste and quality.

Pump Forward Design

New pump forward design reduces
maintenance and cleaning time.



Optional Sliding Tray Mix Storage

Mix tray slides out with mix containers in place
which makes adding mix quicker and easier.




Self Closing Spigots
prevents the mess and
eliminates waste.

Optional Door Latch

**Scroll Compressor
Technology**
provides increased
capacity, reliability and
efficiency.

GES-5400 Soft Serve Freezer

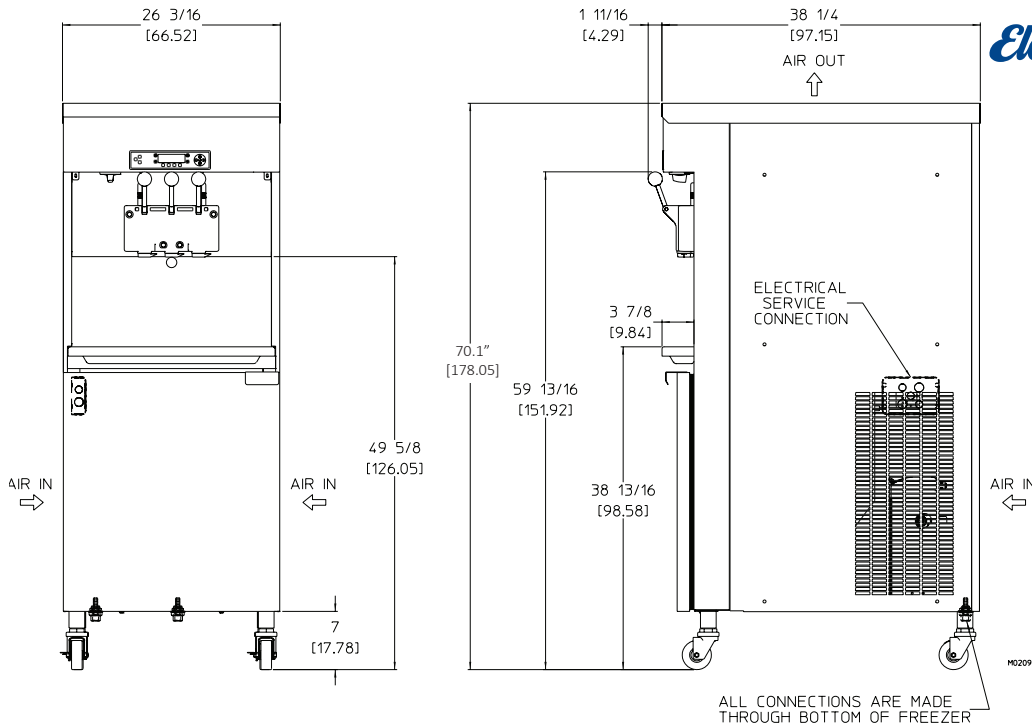

MODEL GES-5400 SPECIFICATIONS

Due to continual product improvements all specifications are subject to change without notice.

| | | | |
|--------------------|--------------------------|-------------------------------|-----------------------|
| Weights | lbs. | kgs. | |
| Net | 914 | 414 | |
| Crated | 995 | 460 | |
| | cu.ft. | cu.m. | |
| Volume | 58.42 | 1.65 | |
| Dimensions | in. | cm | |
| Width | 26-3/16 | 66.52 | |
| Depth | 38-1/4 | 97.15 | |
| Height | 70.1 | 178.05 | |
| Electrical | Maximum Fuse Size | Minimum Ampacity (Qty) | NEMA Plug Type |
| 208-230/60/1 Air | 35 (2) | 29 (2) | 2P, 2W |
| 208-230/60/1 Water | 35 (2) | 27.5 (2) | 2P, 2W |
| 208-230/60/3 Air | 25 (2) | 20 (2) | 3P, 3W |
| 208-230/60/3 Water | 25 (2) | 19 (2) | 3P, 3W |

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

Bidding Spec

Electrical: Volt _____ Hz _____ Ph _____

Cooling: _____ Neutral _____ Yes _____ No

Options: _____

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

Beater Motor

Two, 2hp.

Refrigeration Systems

Two, 19,000 Btuh. R404a.
Separate Cabinet Refrigeration, One, 1200 Btuh, R134a.
Btuh may vary depending on compressor used.

Air Cooled

For proper air circulation, unit requires 6" (15.2 cm) air space at rear panel or 6" side clearance with 1" back and 29" top clearance.

Mix Capacity: 2 tanks - 24 quarts (22.7 liters) ea.

Freezing Cylinder Capacity: two - 5 quarts (4.7 liters) each

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois 61244 USA
Phone (309) 755-4553 • (800) 755-4545
FAX (309) 755-9858
E-mail: sales@electrofreeze.com

Authorized Distributor